



SAE FD&E Weld Challenge II

April-2004

Structural Stress Method

Michele Wegscheid

Reasons International is pursuing this


- Mesh insensitive
- Can distinguish between one-sided and two sided welds, as well as weld ends
- Can distinguish between full penetration and partial penetration welds



SAE FD&E Weld Challenge II

April-2004

Structural Stress - Model

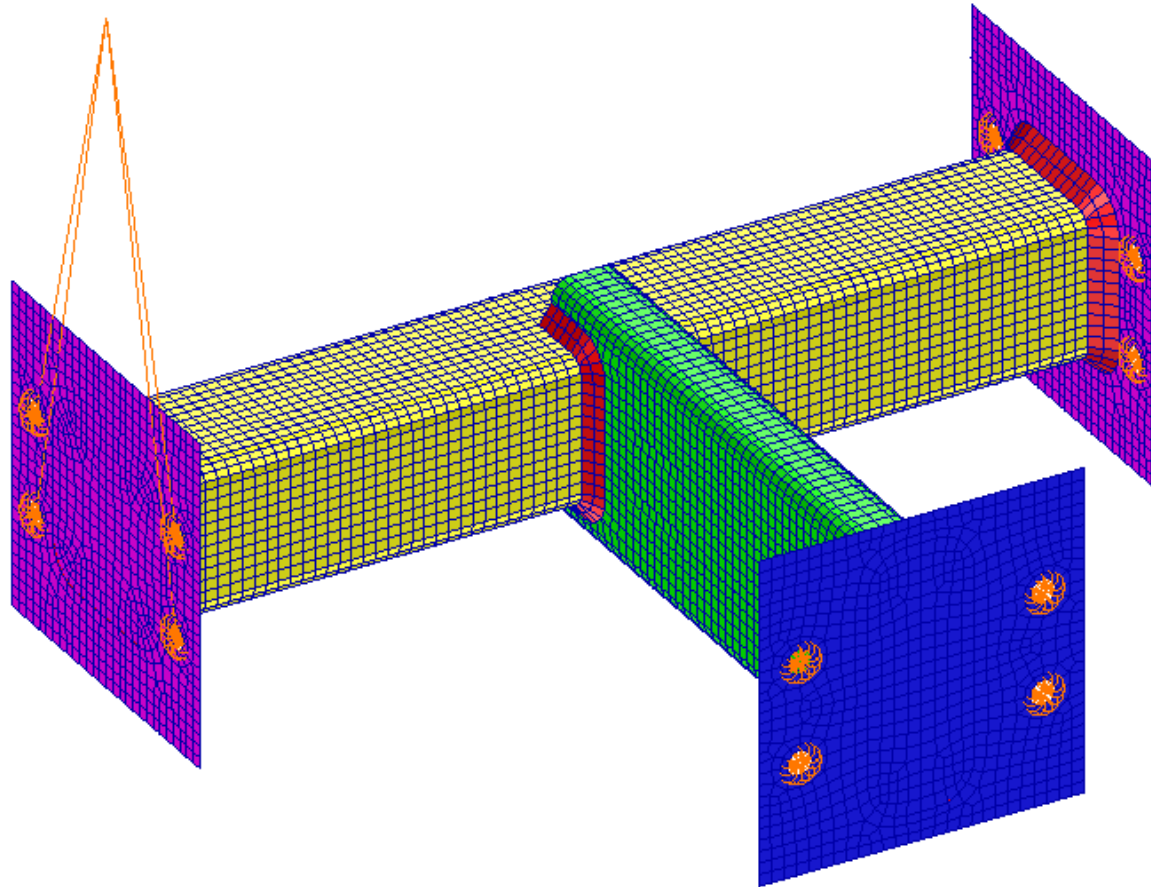




SAE FD&E Weld Challenge II

April-2004

Structural Stress - Results

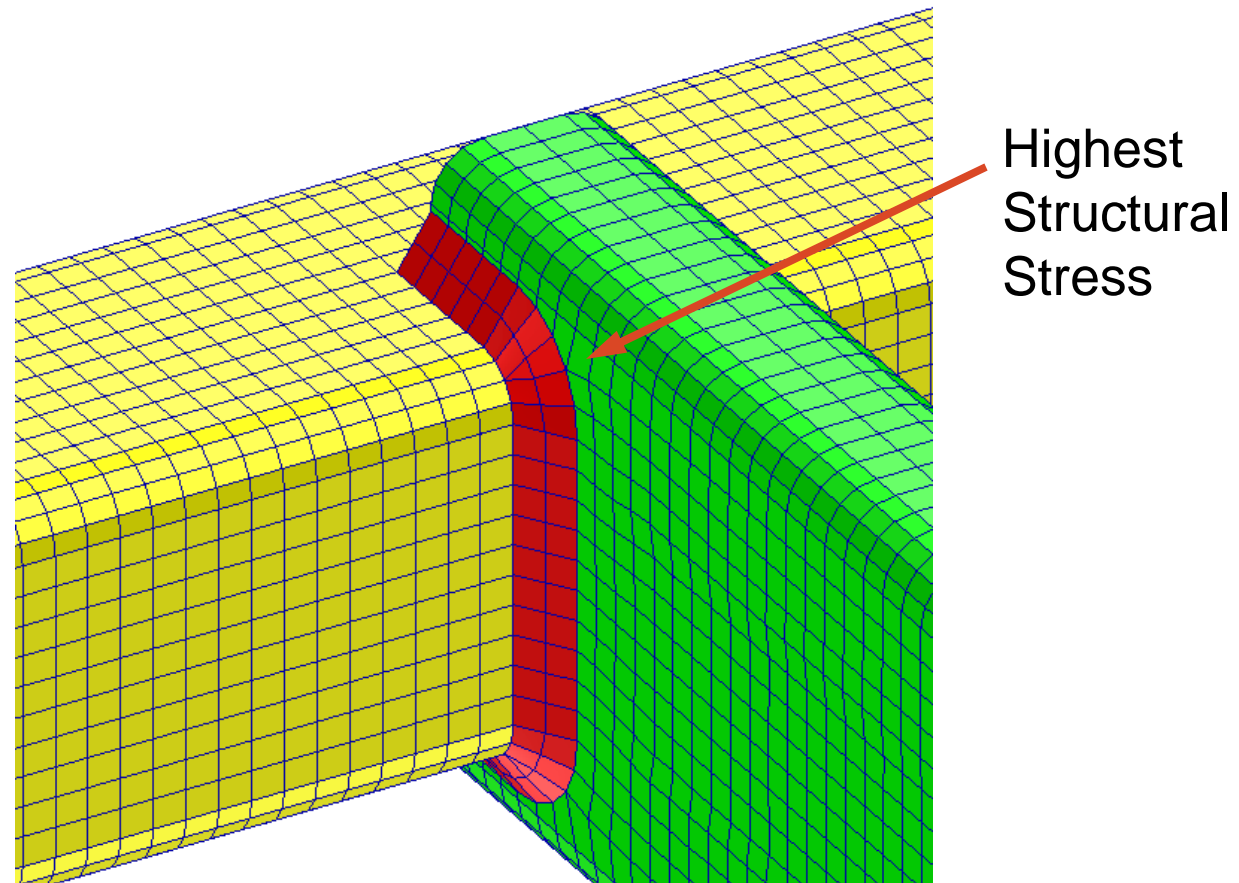



SAE FD&E Weld Challenge II

April-2004

Structural Stress - Results

From Weld Challenge I

- Load Range = 8000 lb
- Equivalent Structural Stress Range
ESS = 245.9 MPa
(Full penetration assumed. Slightly different results than previously reported due to a correction of a minor programming error.)
- Scale Factor = 0.0307 MPa/lb



SAE FD&E Weld Challenge II

April-2004

Structural Stress - Results

- Life estimates using LifEst (Somat EASE)
- Created a “material” with appropriate stress-life parameters to mimic the ESS master curve provided by Battelle
- Grapple skidder time history was unscaled
- No mean stress correction



SAE FD&E Weld Challenge II

April-2004

Structural Stress - Results

- 6106 lb peak
 - Total SF
 $19.2 \text{ lb/bit} * 0.0307 \text{ MPa/lb} = 0.5902 \text{ MPa/bit}$
 - 2362 blocks
- 8618 lb peak
 - Total SF
 $27.1 \text{ lb/bit} * 0.0307 \text{ MPa/lb} = 0.8330 \text{ MPa/bit}$
 - 824 blocks